BP Canada
SAINT-GOBAIN

Roofing Guide

Complete Collection | West

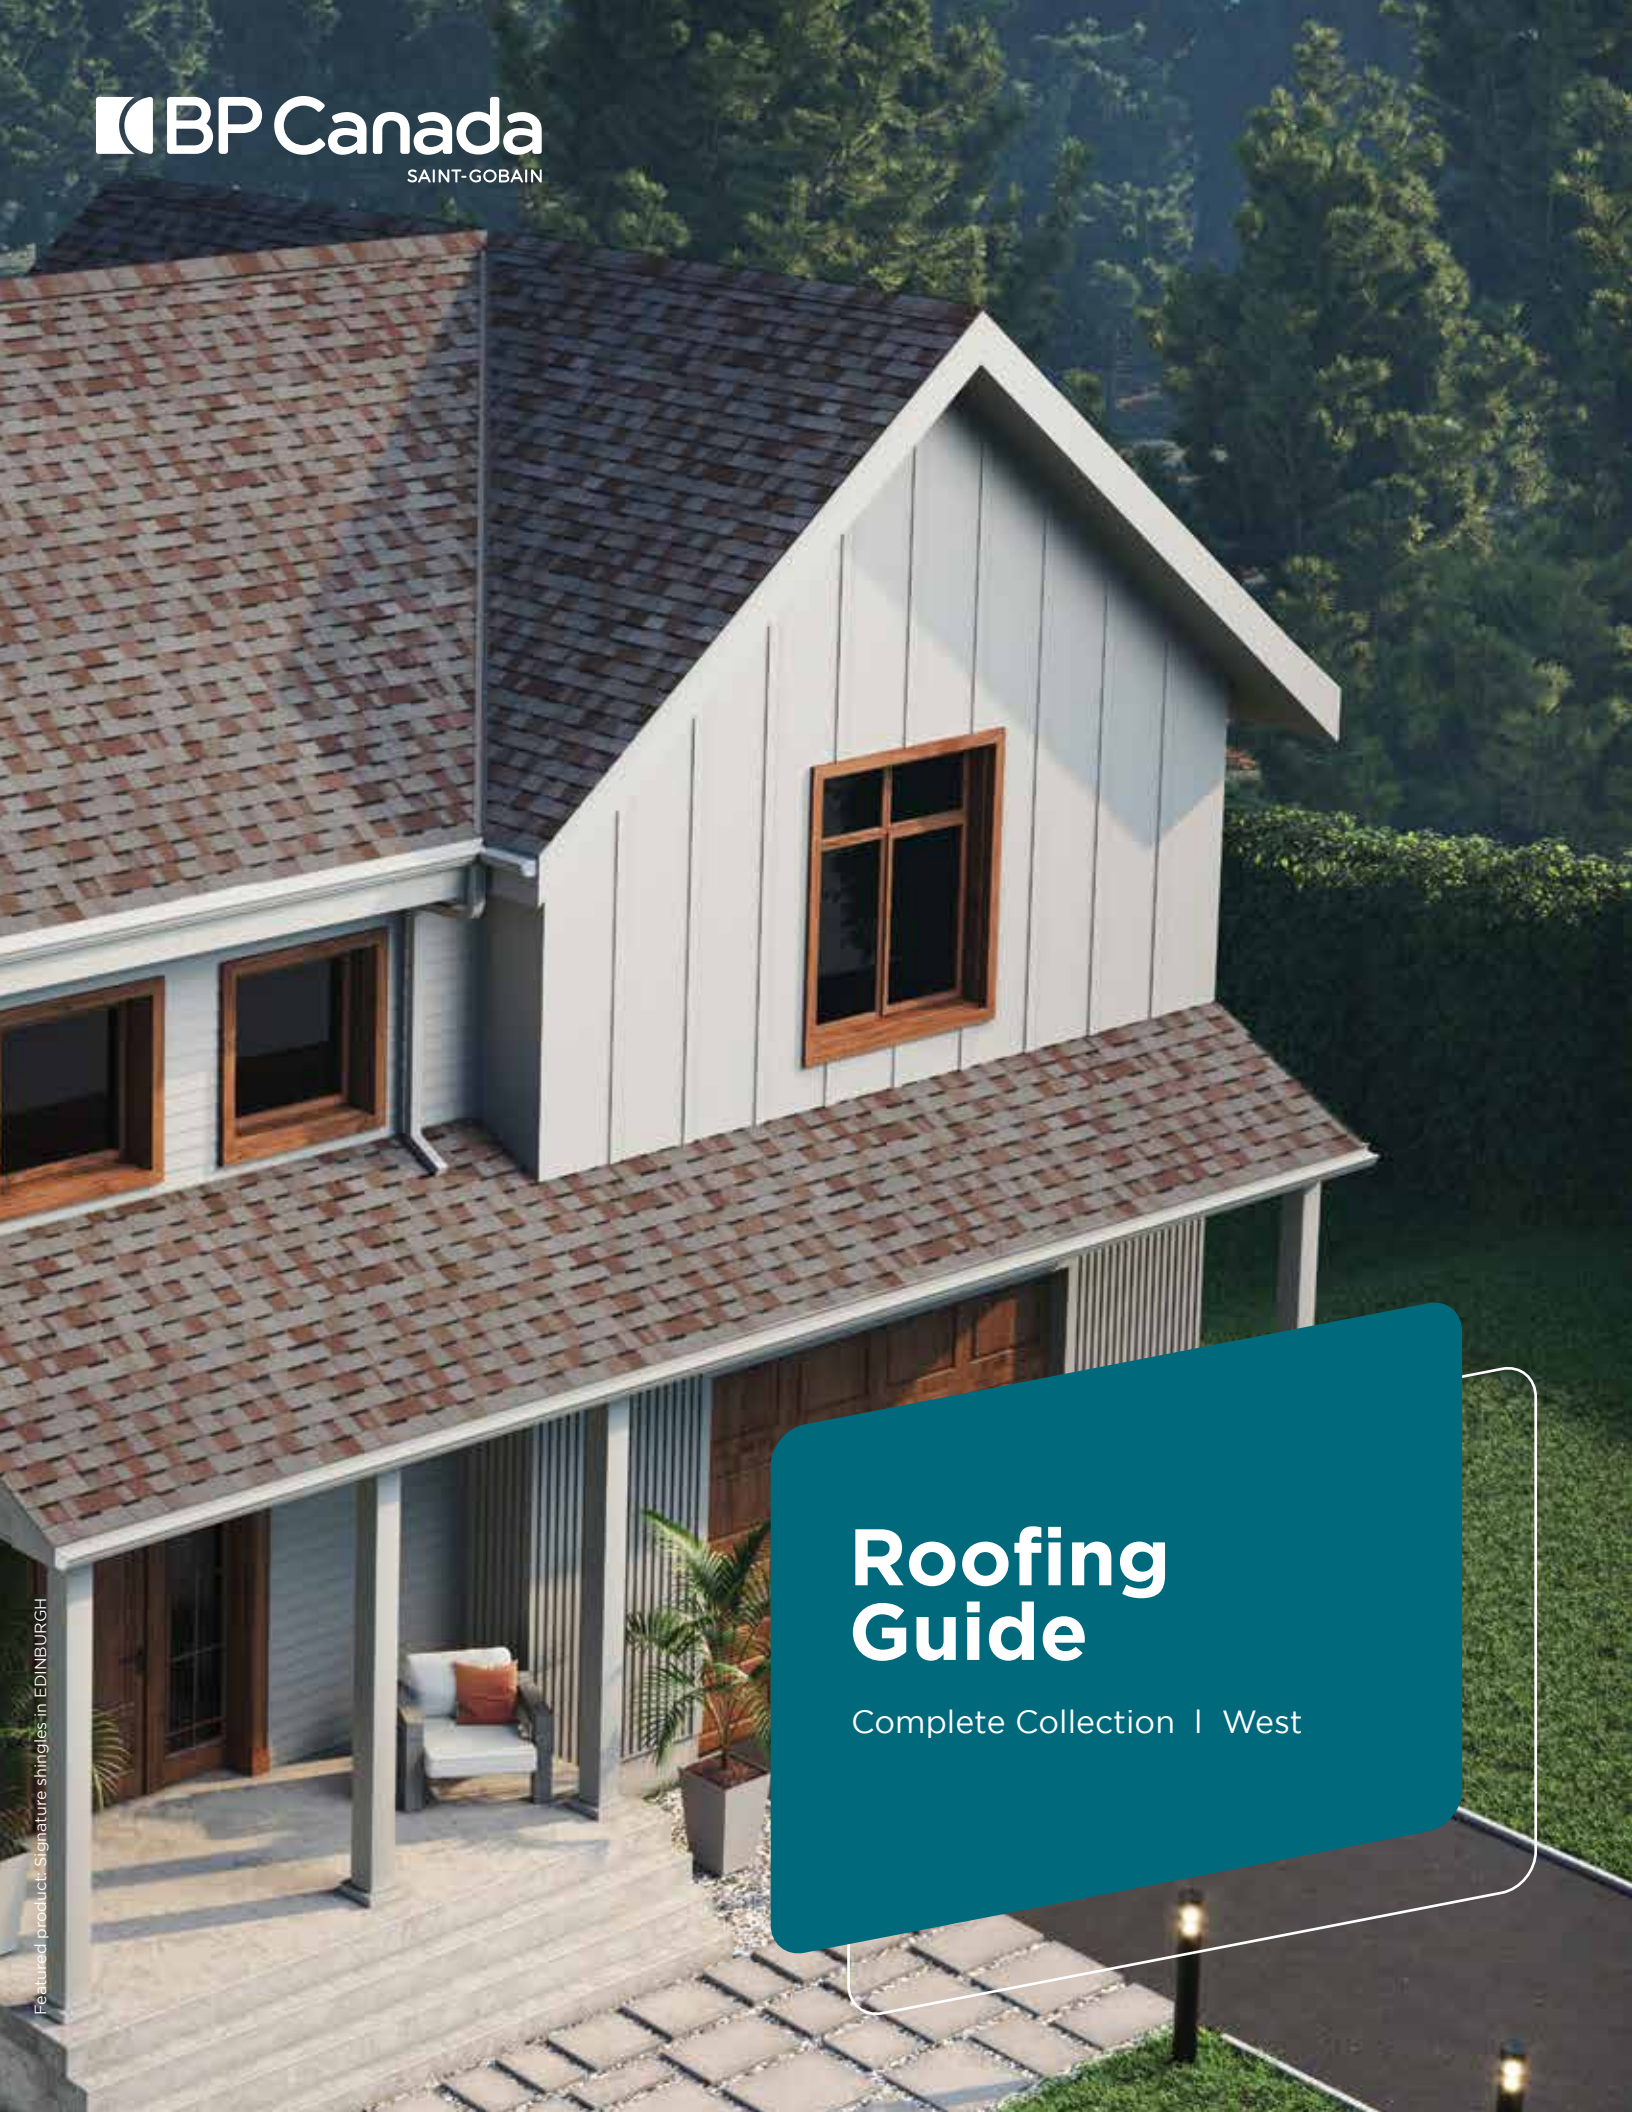

Featured products: Signature shingles in EDINBURGH

EXPERIENCE THE EXCELLENCE OF

BP CERTIFIED ROOFERS

YOUR ROOF, YOUR ROOFER,
YOUR PEACE OF MIND

ENTRUST YOUR PROJECT TO A BP CERTIFIED ROOFER

In order to become BP CERTIFIED, roofers must first comply with our strict list of requirements. By hiring a BP CERTIFIED ROOFER, you are entrusting your project to a highly qualified expert who will ensure your roofing work is completed with absolute care and precision, and who will:

- Verify the condition of your roof deck and recommend any necessary repairs;
- Determine the ventilation required to meet building code standards;
- Propose specific work, if required, such as the installation of eavestroughs or ventilated soffits;
- Present a complete range of BP shingles suited to your roof and your budget;
- Execute the work according to industry standards;
- Clean the work area and remove all debris from your property.

THE BP PROTECTION
Protect your most important investment for longer, and sleep easy with the extended BP warranty — available exclusively through your BP CERTIFIED ROOFER.

Visit **bpcan.com/documentation/** for complete warranty details.

YOUR
CHOICE

SINCE 1905

PERFORMANCE | INTEGRITY
INNOVATION | QUALITY | SERVICE

Proudly Canadian since 1905, BP Canada is a leader in the building materials industry. For over a century, we have contributed to the construction and renovation of thousands of homes and buildings across the country — from the heart of major cities to the most remote regions.

Our roots run deep in Canadian soil, and we take pride in upholding the values that define us: quality workmanship, authentic human relationships, and unparalleled service. Every product we manufacture reflects our commitment to quality, innovation, and local expertise.

Whether you are a distributor, installer, or end user of our products, you can count on us to deliver durable, high-performing solutions, designed right here to meet the realities of our climate and the standards of our industry.

BP Canada — your trusted Canadian choice.

CHROMA
COLOUR LAB®

MASTER COLOURISTS

SHOWING OUR TRUE COLOURS

Constantly on the lookout for the latest trends, we have created the CHROMA Colour Lab® to offer our customers products that are worthy of their aspirations. A place where creativity meets ingenuity, the CHROMA Colour Lab® is where our master colourists combine their expertise with the latest technological advances in granule application to create sophisticated yet natural blends that complement today's upscale exterior finishes.

The result? Unique and timeless blends that deliver a modern interpretation on traditional shingle tints.

YOUR ULTIMATE PROTECTION AGAINST WIND DAMAGE

Our patented WEATHER-TITE® TECHNOLOGY has been an industry reference for 15 years, but have you ever stopped and wondered why it is such an important feature? The reason is simple: nails may fix the shingles down, but it's the sealant that keeps them in place in the long run. When the exposed portion of a shingle is lifted by the wind, the sealant can be contaminated by dust and other impurities thus preventing the shingle from sealing properly. Wind then moves up the roof and lifts the exposed part of the shingle, making it curl. Once released from the wind, the shingle will remain slightly deformed, which will also hinder its ability to seal. Only properly sealed shingles can protect your home from the water infiltration.

The dotted HURRICANE BAND® is the primary wind protection component. Placed at the edge of the exposure ensuring the shingle remains in place over its lifetime.

The solid WEATHER-TITE® band, is a second sealant strip which prevents water infiltration caused by wind-driven rain, while also providing an additional level of protection against wind blow-off.

Nails can help hold the shingles in place until the sealant is fully activated. However, superior sealant performance is the best way to ensure long-term wind resistance.

SUPERIOR RESISTANCE AND PROTECTION AGAINST:

WIND BLOW-OFF



WIND-DRIVEN RAIN

WATER INFILTRATION

SURFACE UPLIFT

WIND OF CHANGE

WEATHER-TITE® TECHNOLOGY

BP Canada's **Yukon** and **Mystique** shingles feature our exclusive Weather-Tite® technology. This patented breakthrough technology has been proven to hold its own against the elements while delivering superior protection against water infiltration.

WEATHER-TITE® PLUS – OR WHY SEALANT MATTERS

Surface uplift can leave shingles deformed and prevent them from properly sealing. Water, dust, and debris that find their way across a sealant strip can also render the seal ineffective. In both instances, the shingle is left exposed to wind-driven rain and wind blow-off. That is why it is crucial that the adhesive seals off quickly after the installation. With that in mind, our research and development team worked on ways to optimize the efficiency of the adhesive on our shingles. The result? Weather-Tite® Plus. By improving upon the sealant itself and the way it is applied on the shingles, we were able to develop a sealing mechanism so efficient that it allows us to offer **standard protection against winds of up to 220 km/h** on all the shingles it is applied on – our **Signature** and **Vangard** collections – no special installation method required!

WIND BLOW-OFF WARRANTIES

	STANDARD Installation Method	HIGH-WIND* Installation Method
SIGNATURE	220 km/h | 135 mph	NOT APPLICABLE
VANGARD	220 km/h | 135 mph	NOT APPLICABLE
MYSTIQUE	180 km/h | 110 mph	220 km/h | 135 mph
YUKON	180 km/h | 110 mph	200 km/h | 125 mph

* High-wind installation method must be followed for high-wind warranty to apply.

IMPACT
RESISTANCE

CLASS 3 AND CLASS 4 CERTIFICATIONS

FLEXIBILITY, DURABILITY, AND PROTECTION

Our shingles are all designed with one goal in mind: to provide your home with the protection it needs. And when you need that extra protection, we've got you covered. Whether you live in a hail prone area or whether you just want that extra peace of mind, we have the shingles to suit your needs. Our proprietary asphalt formulations allow us to offer shingles bearing a rating of **FM 4473 Class 3 (Mystique** and **Signature)** and even **UL 2218 Class 4 (Vangard)** for impact resistance. That kind of rating offers protection against hail larger than golf balls!

DID YOU KNOW?

Some insurance companies grant insurance premium discounts to homeowners who use Class 4 Impact Resistance rated shingles for their roof! Contact your insurer to see if you qualify.

SBS MODIFIED ASPHALT

For ultimate impact protection, turn to our VANGARD shingles with SBS asphalt formulation. They come with a Class 4 Impact Resistance rating, which is the highest rating possible!

TRACKNAIL
NAILING ZONE

PRECISE NAILING, OPTIMAL HOLD

A LAMINATED SHINGLE INNOVATION

Our expanded **1-1/2" TRACKNAIL nailing zone** gives the installer the flexibility they need to make sure they nail the shingles right where they need to ensure optimal holding power while the adhesive gets activated. Available on Mystique, Signature, and Vangard shingles.

SIZE DOES MATTER

Larger shingles — **42 inches** wide, to be exact — mean fewer shingles (and nails!) to handle and install. In other words, this simple feature not only **makes the installer's job easier**, but it also enhances your roof's performance while delivering savings of up to **13%**.

Weather-Tite® ROOFING SYSTEM

STEP 1 EAVE PROTECTION | STEP 2 UNDERLAYMENT | STEP 3 STARTER SHINGLES | STEP 4 SHINGLES | STEP 5 HIP & RIDGE

SYSTEM OVERVIEW

WEATHER-TITE® ROOFING SYSTEM

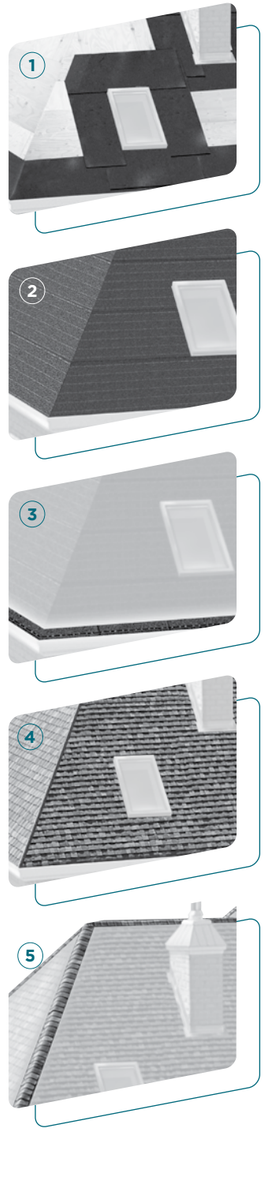

Shingles are without a doubt the star of your roof. And just like any star, they perform at their best when they're well supported. That's why we designed the WEATHER-TITE® ROOFING SYSTEM.

The concept is simple: use BP Canada or authorized Saint-Gobain products for all 5 components of your roof, as described in the manufacturer's installation guide, and get an enhanced warranty. Simple as that — just the best protection of its kind.

Turn to page 25 to see all the benefits of the WEATHER-TITE® ROOFING SYSTEM warranty.

1. Eave Protection

Apply eave protection to high-risk areas to prevent water infiltration.

2. Underlayment

Install a protective underlayment across the entire roof to prevent water infiltration.

3. Starter Shingles

Starter shingles seal the bottom edge of the roof; use pre-cut starter shingles to save time.

4. Shingles

Your roof's first line of defence against the elements also plays a key role in your home's curb appeal. Choose wisely!

5. Hip and Ridge

Properly cap off hips and ridges to prevent water infiltration.

STEP 1

WEATHER-TITE® ROOFING SYSTEM

EAVE PROTECTION

Apply eave protection in the areas that are most at risk for water infiltration: where snow/ice tends to accumulate (on eaves and along valleys), where planes connect (on hips and ridges, valleys), and alongside protruding objects (chimneys, windows). Eave protection will act as a gutter, keeping rainwater from infiltrating the roof deck.

GRIPGARD®

GRIPGARD® is a self-sealing granulated membrane available in a convenient box.

WEATHERTEX®

WEATHERTEX® is a self-sealing sanded membrane.

SMOOTH SURFACE ROLL ROOFING

Smooth surface base sheet roll roofing coated on both sides with fine mineral matter.

SLATE SURFACE ROLL ROOFING

This cap sheet slate surface roll roofing is finished on the exposed side with mineral granules.

STEP 2

WEATHER-TITE® ROOFING SYSTEM

UNDERLAYMENT

Whether you opt for a synthetic membrane or organic saturated felt, apply this second line of defence over the entire surface of the roof to keep any water away from the roofing deck.

BP PRODECK®

BP PRODECK® is a lightweight, synthetic roofing underlayment made of woven polypropylene and a non-woven topcoat.

DECKGARD™

DECKGARD™ is a sturdy, woven polypropylene, synthetic roofing underlayment.

ORGANIC SATURATED FELT

Type 15 • Type 30
#15 • #15 CSA Pro
#15 CSA Classic

STEP 3

WEATHER-TITE® ROOFING SYSTEM

STARTER SHINGLES

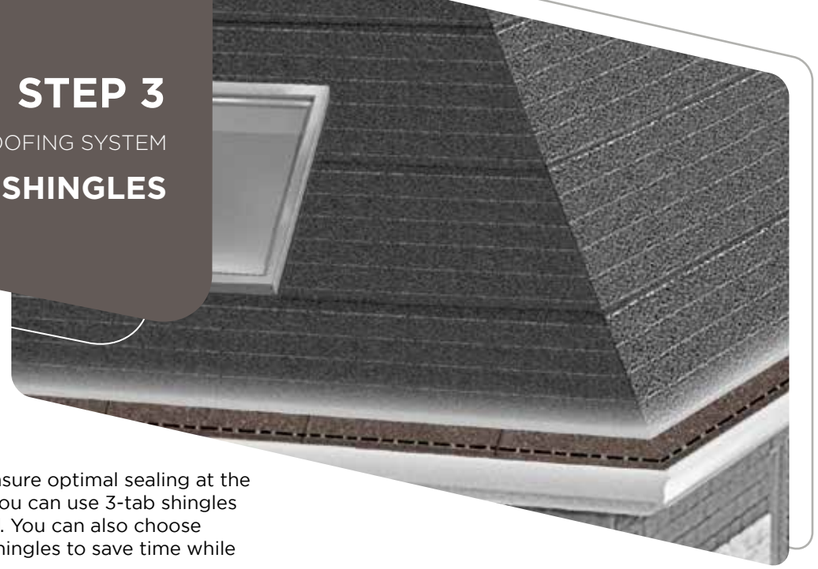

Starter shingles are designed to ensure optimal sealing at the bottom of the roof. For this step, you can use 3-tab shingles with the tabs removed beforehand. You can also choose our pre-cut, ready-to-use starter shingles to save time while reducing jobsite waste.

STARTER SHINGLES

CUT-OFF 3-TAB SHINGLES

STEP 1 EAVE PROTECTION | STEP 2 UNDERLAYMENT | STEP 3 STARTER SHINGLES | STEP 4 SHINGLES | STEP 5 HIP & RIDGE

STEP 4

WEATHER-TITE® ROOFING SYSTEM

SHINGLES

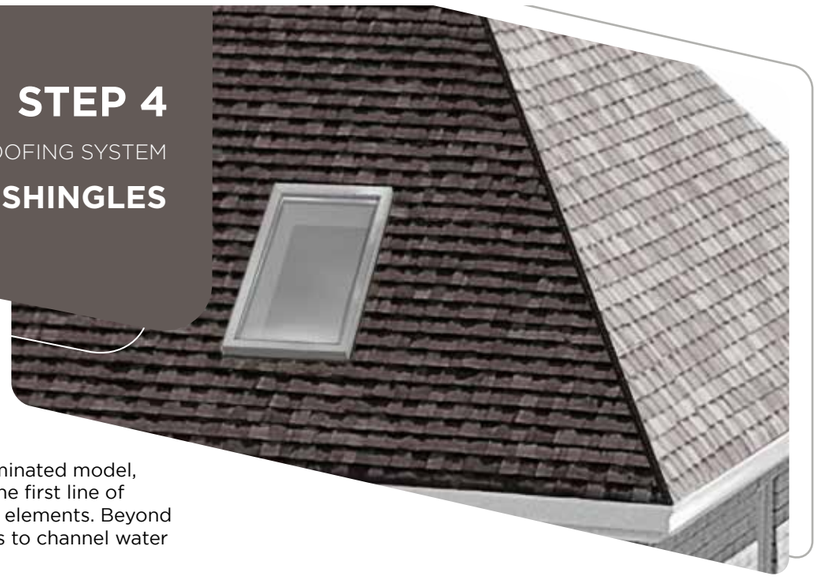

Whether you choose a 3-tab or laminated model, you can count on our shingles as the first line of defence for your home against the elements. Beyond aesthetics, their primary function is to channel water toward the eavestroughs.

TURN TO PAGES 16 – 23 FOR OUR COMPLETE RANGE OF SHINGLES.

STEP 1 EAVE PROTECTION | STEP 2 UNDERLAYMENT | STEP 3 STARTER SHINGLES | STEP 4 SHINGLES | STEP 5 HIP & RIDGE

STEP 5

WEATHER-TITE® ROOFING SYSTEM

HIP & RIDGE

Cap off those hips and ridges to prevent water from infiltrating through joints on the top of your roof. This can be accomplished using cut-out 3-tab shingles, or you can turn to pre-cut products for an impeccable finish.



WHITE CAP® SHINGLES

WHITE CAP® shingles are pre-scored so they easily separate into three perfectly sized tabs without the need of a knife. Their EZ-FOLD design also makes multi-ply installation a breeze by simply folding the shingle onto itself.



CUT-OFF 3-TAB SHINGLES

CUT-OFF 3-TAB SHINGLES are traditionally used to cap off a roof. This method is still popular, though roofing professionals are now turning to more time – and material – efficient solutions.

TURN TO PAGE 24 FOR OUR COMPLETE RANGE OF HIP & RIDGE SHINGLES.

STEP 1 EAVE PROTECTION | STEP 2 UNDERLAYMENT | STEP 3 STARTER SHINGLES | STEP 4 SHINGLES | STEP 5 HIP & RIDGE

STEP 4

WEATHER-TITE® ROOFING SYSTEM

LAMINATED SINGLES

Featured colour: **SILVER GREY**

MYSTIQUE

ALL-AROUND WORRY-FREE PROTECTION

MYSTIQUE shingles are uniquely designed with oversized tabs. They feature dramatic 3-dimensional shadow bands to create a sharp, unique look, that is both eye-catching and strikingly elegant. Choose from an extensive palette of colours designed to instantly enhance your home's curb appeal.

STEP 1	STEP 2	STEP 3	STEP 4	STEP 5	✓
EAVE PROTECTION	UNDERLAYMENT	STARTER SHINGLES	SHINGLES	HIP & RIDGE	

Weather-Tite® TECHNOLOGY

SUPERIOR PROTECTION AGAINST WIND DAMAGE AND WATER INFILTRATIONS

IR CLASS 3

FM CLASS 3 IMPACT RESISTANCE

42"

FASTER INSTALLATION, COST SAVINGS

LIMITED LIFETIME WARRANTY

BEACHWOOD

TWILIGHT GREY

AUTUMN BROWN

SLATE BLACK

SILVER GREY

SUNSET CEDAR

SHADOW BLACK

WEATHERED ROCK

NOTE: Due to limitations of the printing process, actual shingle colours could be different from the photos. It is recommended that you view a full-size shingle before making a final colour selection. We reserve the right to change colours at any time.

STEP 4

WEATHER-TITE® ROOFING SYSTEM

PREMIUM SHINGLES

Featured colour: **EDINBURGH**

SIGNATURE

ROOFING BY DESIGN

Our SIGNATURE shingles strike the perfect balance between design, performance, and individuality. These one-of-a-kind shingles are engineered to withstand the harshest weather conditions. They feature a stunning range of natural, versatile colours that will complement any architectural style.

STEP 1	STEP 2	STEP 3	STEP 4	STEP 5	✓
EAVE PROTECTION	UNDERLAYMENT	STARTER SHINGLES	SHINGLES	HIP & RIDGE	

Weather-Tite® TECHNOLOGY — 220 KM/H STANDARD WIND WARRANTY

IR CLASS 3 — FM CLASS 3 IMPACT RESISTANCE

Chroma COLOUR LAB® — ADVANCED COLOUR AND DESIGN

PROFUSION — CUSTOMIZED ROOFING COLOURS

LIMITED LIFETIME WARRANTY



KANJI

STETSON



DENALI



FIJI

MANHATTAN



JASPER



EDINBURGH



RYE

OREGON



MONTEREY

NOTE: Due to limitations of the printing process, actual shingle colours could be different from the photos. It is recommended that you view a full-size shingle before making a final colour selection. We reserve the right to change colours at any time.

STEP 4

WEATHER-TITE® ROOFING SYSTEM

HIGH PERFORMANCE SHINGLES

Featured colour: **TWILIGHT GREY**

VANGARD

YOUR VERY OWN CANADIAN SHIELD

VANGARD shingles bear a UL 2218 Class 4 rating against impacts, which is the highest possible rating for that category. This means that when it comes to hail and other impacts, these shingles will truly act as your Canadian Shield. Offered in a stylish range of colours, they deliver exceptional strength, lasting durability, and standout style.

Weather-Tite® TECHNOLOGY

220 KM/H STANDARD WIND WARRANTY

IR CLASS 4

UL CLASS 4 IMPACT RESISTANCE

42"

FASTER INSTALLATION, COST SAVINGS

SBS MODIFIED ASPHALT

BETTER FLEXIBILITY AND GRANULE RETENTION

LIMITED LIFETIME WARRANTY

SILVER GREY

TWILIGHT GREY

AUTUMN BROWN

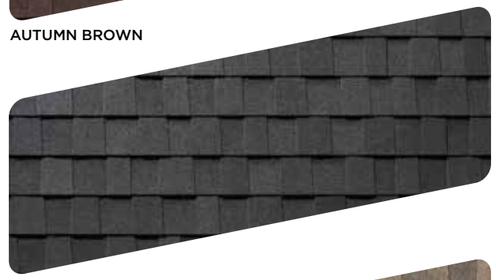

SHADOW BLACK

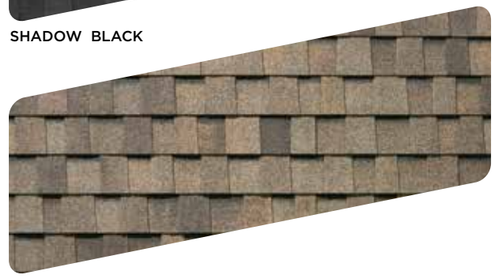

WEATHERED ROCK

NOTE: Due to limitations of the printing process, actual shingle colours could be different from the photos. It is recommended that you view a full-size shingle before making a final colour selection. We reserve the right to change colours at any time.

STEP 4

WEATHER-TITE® ROOFING SYSTEM

3-TAB SHINGLES

Featured colour: **SILVER GREY**

YUKON

A PERFECT BLEND OF STYLE AND RUGGEDNESS

YUKON 3-tab shingles can be used as starter shingles and hip & ridge to complement Mystique laminated shingles or use them on their own for a distinctive 3-tab pattern.

STEP 1	STEP 2	STEP 3	STEP 4	STEP 5	✓
EAVE PROTECTION	UNDERLAYMENT	STARTER SHINGLES	SHINGLES	HIP & RIDGE	

Weather-Tite® TECHNOLOGY

180 KM/H STANDARD WIND WARRANTY

25-YEAR WARRANTY

SILVER GREY

TWILIGHT GREY

SHADOW BLACK

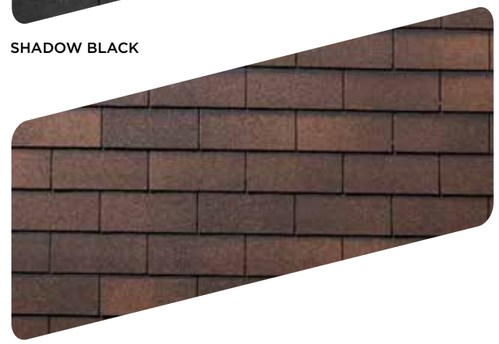

AUTUMN BROWN

NOTE: Due to limitations of the printing process, actual shingle colours could be different from the photos. It is recommended that you view a full-size shingle before making a final colour selection. We reserve the right to change colours at any time.

WHITE CAP®

They say you can't please everyone, but we beg to differ. Our **WHITE CAP® hip & ridge** shingles will delight homeowners with their colour palette designed to match our existing laminated shingles and their choice of 1-, 2-, or 3-layer application. Roofing professionals will be just as thrilled with WHITE CAP®'s pre-scored E-Z FOLD design allowing for a quick and flawless no-knife installation.

E-Z FOLD SHINGLE
For quick and
easy layered application

WHITE CAP Hip and Ridge perfectly matches our Mystique, Signature and Vangard colours.

NO KNIFE REQUIRED:
pre-scored shingles with easy-to-tear tabs.

CHOOSE FROM 1-, 2- OR 3-LAYER
application for a look as unique as you are.

AVAILABLE IN A WIDE RANGE OF COLOURS
to perfectly match our laminated shingles.

Weather-Tite® ROOFING SYSTEM

THE ROOFING SYSTEM WARRANTY

Install BP Canada and authorized Saint-Gobain products, manufactured for quality and compatibility, to get the best return on your investment as well as long-lasting peace of mind.

RESIDENTIAL BUILDING [1, 2]

LAMINATED SHINGLES (MYSTIQUE, SIGNATURE AND VANGARD) AND **3-TAB SHINGLES** (YUKON)

WARRANTY TYPE	YUKON		MYSTIQUE, SIGNATURE*		VANGARD*	
	STANDARD LIMITED WARRANTY	WEATHER-TITE® ROOFING SYSTEM LIMITED WARRANTY	STANDARD LIMITED WARRANTY	WEATHER-TITE® ROOFING SYSTEM LIMITED WARRANTY	STANDARD LIMITED WARRANTY	WEATHER-TITE® ROOFING SYSTEM LIMITED WARRANTY
WARRANTY TERM	30[3] - YEARS		LIMITED LIFETIME		LIMITED LIFETIME	
UNIQUE TO BP TOTAL PROTECTION PERIOD	UNAVAILABLE	YEAR 1 Replacement of all components of the defective area of the roof **without exclusions**	UNAVAILABLE	YEARS 1 to 2 Replacement of all components of the defective area of the roof **without exclusions**	UNAVAILABLE	YEARS 1 to 5 Replacement of all components of the defective area of the roof **without exclusions**
UP-FRONT PROTECTION PERIOD	YEARS 1 to 5 Defective shingles and labour to install shingles only	YEARS 2 to 10 Replacement of all components of the defective area of the roof excluding disposal	YEARS 1 to 15 Defective shingles and labour to install shingles only	YEARS 3 to 20 Replacement of all components of the defective area of the roof excluding disposal	YEARS 1 to 15 Defective shingles and labour to install shingles only	YEARS 6 to 20 Replacement of all components of the defective area of the roof excluding disposal
LIFETIME WARRANTY PROTECTION PERIOD	UNAVAILABLE	AFTER YEAR 10 Prorated coverage of defective shingles only	AFTER YEAR 15 Prorated coverage of defective shingles only	AFTER YEAR 20 Prorated coverage of defective shingles only	AFTER YEAR 15 Prorated coverage of defective shingles only	AFTER YEAR 20 Prorated coverage of defective shingles only
TRANSFERABILITY	1 TIME 100% - transfer within first 5 years Written Notification within 30 days **Transfer Cost: $100**	1 TIME 100% - transfer within **FIRST 10 YEARS** Written Notification **WITHIN 60 DAYS** **Transfer Cost: FREE**	1 TIME 100% - transfer within first 10 years Written Notification within 30 days **Transfer Cost: $100**	1 TIME 100% - transfer within **FIRST 20 YEARS** Written Notification **WITHIN 60 DAYS** **Transfer Cost: FREE**	1 TIME 100% - transfer within first 10 years Written Notification within 30 days **Transfer Cost: $100**	1 TIME 100% - transfer within **FIRST 20 YEARS** Written Notification **WITHIN 60 DAYS** **Transfer Cost: FREE**
WIND WARRANTY	REGULAR INSTALLATION **180 KM/H – 110 MPH** HIGH WIND INSTALLATION **200 KM/H – 125 MPH**		REGULAR INSTALLATION: **180 KM/H – 110 MPH** HIGH WIND INSTALLATION: **220 KM/H – 135 MPH** ***SIGNATURE and VANGARD** STANDARD INSTALLATION: **220 KM/H – 135 MPH**			
ALGAE WARRANTY	5 YEARS		10 YEARS			

ELIGIBLE BUILDINGS:
Single-family home (or row house with a physically delimited roof) provided the individual is the sole owner of the home that serves as the owner's residence.

DISCLAIMERS:
[1] For **non residential** buildings, please refer to our website at **bpcan.com** | [2] Warranty limited to the original labour and materials cost. | [3] Applies to **YUKON** 3-tab shingles.

Please visit **bpcan.com** to review all legal documents and requirements for the **Standard Warranty (Standard Limited Warranty)** and **Weather-Tite® Roofing System Limited Warranty**.

For more details on the Weather-Tite® Roofing System, please turn to page 10.

SPECIFICATIONS

LAMINATED SHINGLES

DIMENSIONS (APPROX.)	EXPOSURE	AVERAGE NUMBER OF SHINGLES PER 3 BUNDLE	AVERAGE COVERAGE PER BUNDLE	INSTALLATION	SPECIFICATION COMPLIANCE	WARRANTY PERIOD (YRS)	WIND PROTECTION[1]	
MYSTIQUE								
1 067 mm × 356 mm (42" × 14")	152 mm (6")	57	3.06 m² (32.9 sq. ft.)	Standard slope: ≥ 1:3 (4/12) Low slope: ≥ 1:6 (2/12) à < 1:3 (4/12)	FM 4473 Class 3 Impact Resistance CSA A123.5, CSA A123.51, CSA A123.52 ASTM D3462, ASTM D3018, ASTM D7158 – Class H ASTM D3161 – Class F UL 790 Fire Resistance A CAN/ULC S107, and ASTM E108 Fire Resistance Class A	Limited Lifetime	**STANDARD** Application[2]:	**HIGH WIND** Application[3]:
							180 km/h (110 mph)	220 km/h (135 mph)
SIGNATURE								
1 067 mm × 356 mm (42" × 14")	152 mm (6")	57	3.06 m² (32.9 sq. ft.)	Standard slope: ≥ 1:3 (4/12) Low slope: ≥ 1:6 (2/12) à < 1:3 (4/12)	FM 4473 Class 3 Impact Resistance CSA A123.5, CSA A123.51, CSA A123.52 ASTM D3462, ASTM D3018, ASTM D7158 – Class H, ASTM D3161 – Class F UL 790 Fire Resistance A CAN/ULC S107, and ASTM E108 Fire Resistance Class A	Limited Lifetime	**STANDARD** Application[2]:	**HIGH WIND** Application[3]:
							220 km/h (135 mph)	Not applicable
VANGARD								
1 067 mm × 356 mm (42" × 14")	152 mm (6")	57	3.06 m² (32.9 sq. ft.)	Standard slope: ≥ 1:3 (4/12) Low slope: ≥ 1:6 (2/12) à < 1:3 (4/12)	UL2218 Class 4 Impact Resistance CSA A123.5, CSA A123.51, CSA A123.52 ASTM D3462, ASTM D3018, ASTM D7158 – Class H, ASTM D3161 – Class F CAN/ULC S107, UL790 and ASTM E108 Fire Resistance Class A	Limited Lifetime	**STANDARD** Application[2]:	**HIGH WIND** Application[3]:
							220 km/h (135 mph)	Not applicable

1. Please refer to application instructions on bpcan.com for more information.
2. Standard Wind Warranty applies when shingles are installed using standard application.
3. High Wind Warranty applies when shingles are installed using high wind application.

3 - TAB SHINGLES

DIMENSIONS (APPROX.)	EXPOSURE	AVERAGE NUMBER OF SHINGLES PER 3 BUNDLE	AVERAGE COVERAGE PER BUNDLE	INSTALLATION	SPECIFICATION COMPLIANCE	WARRANTY PERIOD (YRS)	WIND PROTECTION[1]	
YUKON								
1 000 mm × 336 mm (39 ⅜" × 13 ¼")	143 mm (5 ⅝")	21	3 m² (32.3 sq. ft.) or 9 linear m (29.6 linear ft.) if used for hip & ridge	Standard slope: ≥ 1:3 (4/12) Low slope: ≥ 1:6 (2/12) to < 1:3 (4/12)	CSA A123.5, CSA A123.51, CSA A123.52, ASTM D3462, ASTM D3018 ASTM D3161 – Class F UL 790, CAN/ULC S107, and ASTM E108 Fire Resistance Class A	25	**STANDARD** Application[2]:	**HIGH WIND** Application[3]:
							180 km/h (110 mph)	200 km/h (125 mph)

HIP & RIDGE

DIMENSIONS (APPROX.)	EXPOSURE	SHINGLES / BUNDLE	COVERAGE / BUNDLE	SPECIFICATION COMPLIANCE	WARRANTY PERIOD (YRS)	WIND PROTECTION[1]
WHITE CAP						
1 000 mm × 336 mm (39 ⅜ po × 13 ¼ po)	143 mm (5 ⅝ po)	21	1-layer application: 29.6 lin. ft. (9 lin. m.) 2-layer application: 14.8 lin. ft. (4.5 lin. m.) 3-layer application: 9.8 lin. ft. (3 lin. m.)	CSA A123.5 ASTM D3462 ASTM D3161, Class A, D and F Meets Class A requirements for roof coverings fire test in accordance with ASTM E108, UL790 and CAN/ULC S107	Same as shingles installed	

1. Please refer to application instructions on bpcan.com for more information.
2. Standard Wind Warranty applies when shingles are installed using standard application.
3. High Wind Warranty applies when shingles are installed using high wind application.

SAINT-GOBAIN

BP CANADA

9510, rue St-Patrick
LaSalle, QC H8R 1R9 I Canada

3703 - 101 Avenue N.W.
Edmonton, AB T6P 1X7 I Canada

BPCAN.COM

SCAN TO LEARN
ALL ABOUT
OUR PRODUCTS

Printed in Canada / 01-2026 / GBL-WEST ENG